

LIS008178808B2

(12) United States Patent

Strittmatter

(10) Patent No.: US 8,178,808 B2 (45) Date of Patent: May 15, 2012

(54)	BREATHABLE SEALED DOME SWITCH ASSEMBLY				
(75)	Inventor:	Patrick Clement Strittmatter, Irving, TX (US)			
(73)	Assignee:	Research in Motion Limited, Waterloo (CA)			
(*)	Notice:	Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 264 days.			
(21)	Appl. No.:	12/710,457			

(22) Filed: **Feb. 23, 2010**

(65) **Prior Publication Data**

US 2010/0213044 A1 Aug. 26, 2010

Related U.S. Application Data

(60) Provisional application No. 61/154,905, filed on Feb. 24, 2009.

(51)	Int. Cl.		
	H01H 13/70	(2006.01)	
(52)	U.S. Cl		200/515
(58)	Field of Classifica	tion Search	200/330,
•			200/515
	See application file	for complete search	history.

(56) References Cited

U.S. PATENT DOCUMENTS

4,046,975	Α		9/19/7	Seeger, Jr.	
4,066,855	Α		1/1978	Zenk	
4,249,044	Α		2/1981	Larson	
4,365,408	Α	*	12/1982	Ditzig	29/622
4,485,279	Α		11/1984	Nakamura	

4,524,254	A	6/1985	Yoshida et al.
4,636,598	A	1/1987	Suzuki
4,800,244	A	1/1989	Suzuki
4,916,275	A *	4/1990	Almond 200/516
5,308,939	A	5/1994	Sasaki
5,823,325	A *	10/1998	Lin 200/344
5,874,700	A	2/1999	Hochgesang
5,895,900	A	4/1999	Okada et al.
5,969,320	A	10/1999	Leeper et al.
6,495,780	B1*	12/2002	Tucci et al 200/302.1
6,710,274	B2 *	3/2004	Whetzel et al 200/330
6,794,590	B2	9/2004	Federspiel
7,759,591	B2*	7/2010	Kim et al 200/181
2005/0121299	A1	6/2005	Ide et al.
2006/0198086	Al	9/2006	Wang

FOREIGN PATENT DOCUMENTS

WO WO 01/86676 A1 11/2001

OTHER PUBLICATIONS


Search Report from corresponding European Application No. 10154368.4; search completed May 7, 2010.

Primary Examiner — Briggitte R Hammond (74) Attorney, Agent, or Firm — Novak Druce + Quigg LLP

(57) ABSTRACT

A sealed dome switch assembly is provided to allow air to flow between the interior and the exterior of the dome switch during the collapse and recovery of the resilient dome shell. The sealed dome switch assembly comprises at least one vent leading between the interior space and the exterior space of the sealed dome switch, wherein the vent is covered by a membrane that is permeable to air and resilient to liquid (e.g. water) and small particles (e.g. dirt). A vent may also be used to network the interiors of a plurality of sealed dome switches to at least one exterior entranceway that is covered by the membrane.

13 Claims, 18 Drawing Sheets

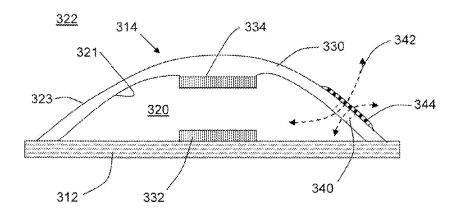

^{*} cited by examiner